

MB series

FILTERING CARTRIDGES
NOMINAL - MELT-BLOWN
OD 2.5" (63 mm)



MAIN APPLICATIONS:

- DESALINATION
- WATER TREATMENT
- FINE CHEMICAL
- PETROLCHEMICAL
- OIL & GAS
- FOOD & BEVERAGE
- POWER GENERATION
- PAINT AND RESINS
- PHARMACEUTICAL
- MICROELECTRONIC
- GALVANIC
- HYDRAULIC
- STEEL MILL
- GENERAL INDUSTRY

CHARACTERISTICS:

- Depth filtration
- Graded density filtration matrix
- 100% pure polypropylene
- Surfactant, binder and adhesive free construction
- High dirt holding capacity
- Non fibre releasing
- Filtration direction from out to in
- Resistant to contaminant unloading even at high Delta-P
- Six end caps configuration available
- Wide range chemical compatibility
- Suitable for both liquid and gas filtration
- Available in two versions
- FDA CFR Title 21 and NSF42 approved polypropylene
- 1935/2004/CE certification available upon request
- Filtration rating from 0.5 to 150 µm

ASCO FILTRI



MB series

**FILTERING CARTRIDGES
NOMINAL - MELT-BLOWN
OD 2.5" (63 mm)**

TECHNICAL DATA

MAX. WORKING TEMPERATURE

MBN 80 °C max.
MBH 60 °C max.

DIFFERENTIAL PRESSURE

Cartridge replacement:

2.5 bar @ 25 °C

Max. allowable:

4.2 bar @ 25 °C

2.1 bar @ 60 °C

1.2 bar @ 80 °C (only MBN)

CONSTRUCTION MATERIAL

Filter media:

- Polypropylene

End caps:

- Polypropylene

Gaskets:

- Buna-n

- EPDM

- Viton

- Silicone

DIMENSIONS

External diameter:

2.5" (63 mm)

Internal diameter:

1.1" (28 mm)

Length:

10", 20", 30", 40", 50", 60"

FILTERING AREA

10": 0.05 m²

20": 0.10 m²

30": 0.15 m²

40": 0.20 m²

50": 0.25 m²

60": 0.30 m²

Flow-rate / Delta-P - DHC data:

Filtration (µm)	Liquids		Air 0.018 cP	DHC [gr]
	1 cP	10 cP		
0.5	0.7	0.07	100	30
1	1.0	0.10	150	40
3	1.2	0.12	150	55
5	1.5	0.15	150	60
10	1.8	0.18	150	110
20	2.0	0.20	150	125
50	2.0	0.40	150	155
75	2.0	0.50	150	175
≥ 100	2.0	0.60	200	200


Liquids flow-rate (m³/h) - Air flow-rate (Nm³/h @ 7 barg) - Clean Delta-P 0.1 bar
For gas different than air: DP = 0.1 x gas viscosity (cP) / 0.018 cP (air).

Flow-rate valid for clean water and air, reduce the flow-rate according to the application.

Available filtration rating:

Series	Filtration (µm)									
	0.5	1	3	5	10	20	50	75	100	150
MBN	X	X	X	X	X	X	X	X	X	X
MBH		X	X	X	X	X	X	X	X	X

Ordering information:

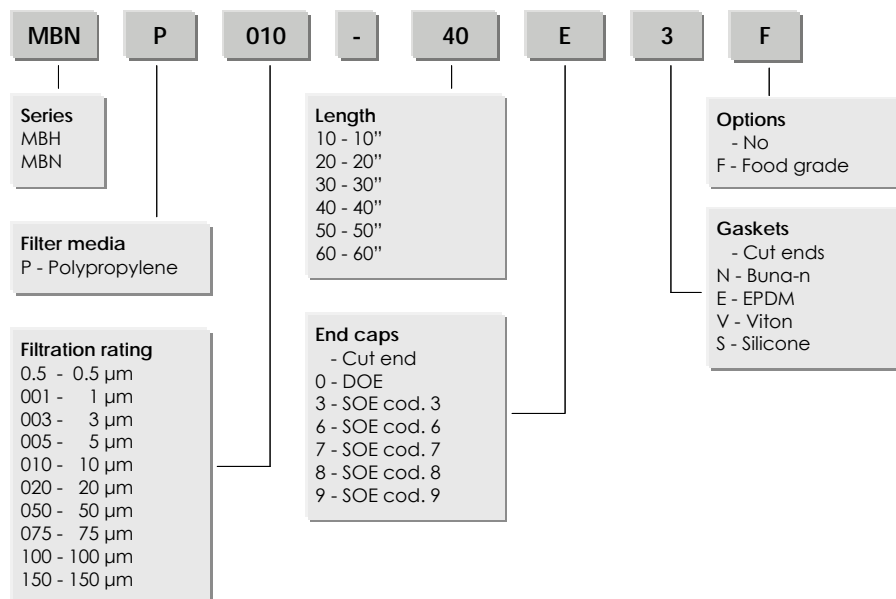

We reserve the right to change the data of this specification without notice.

ASCO Filtri S.p.A.

Viale delle Scienze, 8
20082 Binasco (MI) - Italy
Phone: +39 02 89703.1

Fax: +39 02 89703.410

E-mail: asco@ascofiltri.com

Web: www.ascofiltri.com

**ASCO
FILTRI**